

airpixel.cz

AIR Commander
ENTIRE

Sony VENICE

USER'S MANUAL

Before using this product, carefully read all product documentation and retain it for future reference.

Connection

Thanks for choosing Entire for Sony Venice camera control! Connection is very easy and takes just few minutes.



Entire configuration and connection:

1. Open the Entire's menu, select "Control mode" and switch to "LAN"
2. Connect the LAN adaptor for VENICE by 6pin cable to PORTMULTI of the Entire
3. After few seconds the Entire will show "Dongle ready" status as sign of proper connection
4. Connect LAN cable to the adaptor RJ45 outlet



Camera configuration and connection:

1. Turn on the camera and open MENU
2. Open Technical > Authentication
3. Set User Name - "admin"
4. Set Password - "A1234567"
5. Open Network configuration
6. Set static IP (disable DHCP)
7. Configure IP address 192.168.10.50
8. Check if network is set to LAN mode
9. Connect LAN cable into the camera
10. Check the Entire's overview page for camera connection

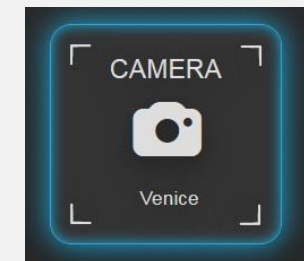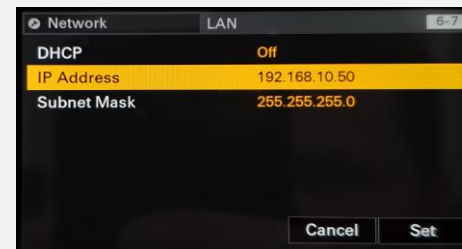

Additional information:

ND Filters are controlled by function "Exposure Corr." Of the Entire

Warranty

All warranty and post-warranty service provides manufacturer at www.airpixel.cz. If any malfunction or non-usual behavior occur, stop using device and contact manufacturer at info@airpixel.cz.

Manufacturer

AIRPIXEL.CZ

Ing. Ilja Mašík Ph.D.

Na výsluní 25

Prague 10

100 00

Czech Republic

Made in Czech Republic