

airpixel.cz

AIR Commander
ENTIRE

RED Cameras

USER'S MANUAL





Before using this product, carefully read all product documentation and retain it for future reference.

Install upgrade (license)

Thanks for choosing Entire. Basic FW of the Entire does not include RED camera control. Upgrade is available at our store as online product. Once order is successfully finished, please contact us with order number and request code from your Entire.

How to install license?


- 1) Open the Entire's web control page, then MENU and Miscellaneous.
- 2) Swipe and click to Installed licenses.
- 3) Click to any row, request code is the not related to row you select.
- 4) From new window you can simply copy text of the request code or you can also click to "Send request code by email".
- 5) We will generate your license code immediately once received and respond your email with license code.
- 6) Copy license code from our response email to the license manager.
- 7) License code is locked to one device (depending on request code).
- 8) Once license code is successfully installed, "RED Control" option is enabled in the Entire menu.

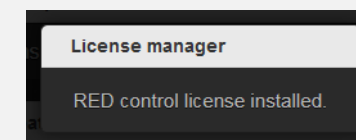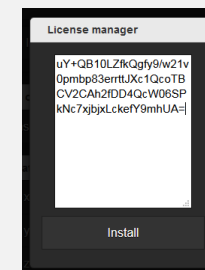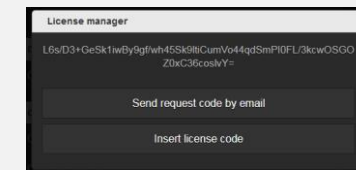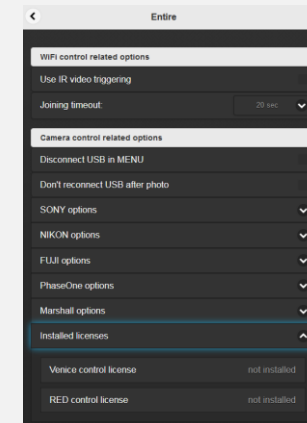

Entire and Camera configuration (not KOMODO)



Entire configuration:

- 1) In the Entire, you only need to switch Control mode to "RED Camera"

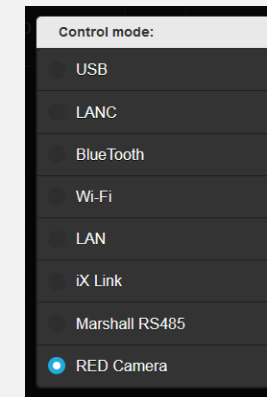

Camera configuration for WiFi control:

- 1) Open menu of the camera and navigate:
 - SETTINGS > SETUP > COMMUNICATION > WiFi > Infrastructure Setting
- 2) Select WiFi mode "Infrastructure"
- 3) Click to "IP Config"
 - Disable DHCP (Uncheck the box)
 - Set IP Address to 192.168.10.55
 - Netmask: 255.255.255.0
 - Gateway: 192.168.10.1
- 4) Close the IP Setting
- 5) Click to Scan and find Entire's hotspot
- 6) Confirm and click to Connect
- 7) Wait for Camera -> Entire connection to be successfully established
- 8) Once camera will connect the Entire's hotspot, the Entire will find the camera automatically, turn the STATUS LED Green and all control will be available.

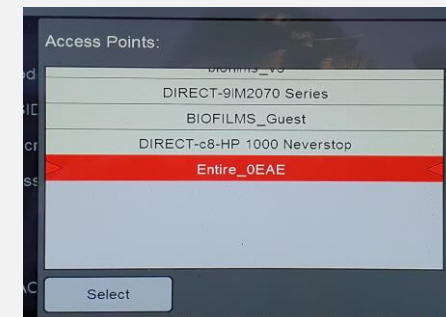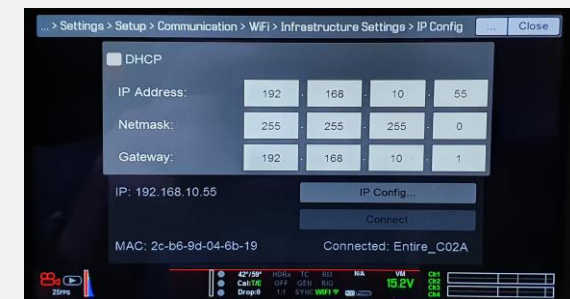



Entire and Camera configuration for KOMODO

Camera configuration for WiFi control:

- 1) Open menu of the camera and navigate to WiFi configuration
- 2) Enable camera WiFi hotspot

Entire configuration:

- 1) In the Entire, you only need to switch Control mode to "RED Camera"
- 2) In the Entire open MENU - WiFi connection
- 3) Click to empty slot
- 4) Click to "New scan" button
- 5) Wait for new scan and select KOMODO's WiFi hotspot from the list
- 6) Connect to the camera hotspot
- 7) In few seconds should camera status become online and all controls available

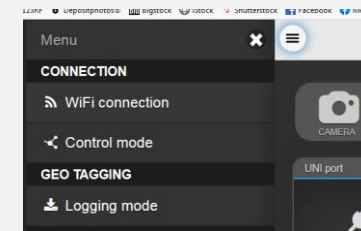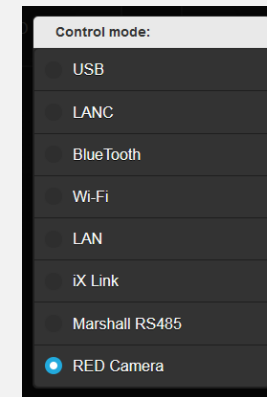

Warranty

All warranty and post-warranty service provides manufacturer at www.airpixel.cz. If any malfunction or non-usual behavior occur, stop using device and contact manufacturer at info@airpixel.cz.

Manufacturer

AIRPIXEL.CZ

Na výsluní 25

Prague 10

100 00

Czech Republic

Made in Czech Republic